




PE Engineered Foam

Rigid, resilient, easy to fabricate, multiple impact cushioning ...

PE foam is non-dusting, lint free and non-abrasive. It provides substantial cushioning against repeated impacts while reducing shipping costs significantly. Foam planks are extremely simple to fabricate.

Engineered foam can be die-cut, heat welded, glued, saw cut, split, water jet cut, routed and drilled to precise specifications.

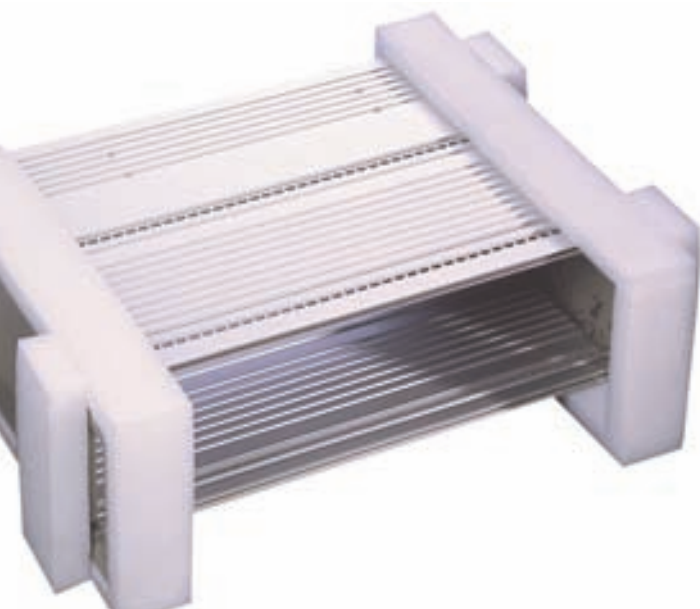

NOPAPLANK®

Polyethylene foam plank is an extraordinarily versatile, fully extruded, durable material that gives a unique combination of excellent physical and chemical properties with an excellent appearance.

The light-weight closed-cell construction offers excellent cushioning against repeated impacts and can be engineered with anticipated performance. It provides easy fabrication, cost-effectiveness and suitability for a wide range of applications.

NOPAPLANK is free of ozone depleting CFC's and the non-cross linked construction means it can be completely recycled back to the base raw material.

Available in anti-static and a wide range of colours and thicknesses up to 100mm and densities from 25 kg/m³ up to 150 kg/m³



POLYLAM®

Clean, resilient POLYLAM laminated plank is perfect for a variety of applications. The laminated construction offers tried and tested cushioning performance and customised dimensions to increase fabrication efficiency.

POLYLAM offers outstanding protection, easy fabrication and is CFC free.

Fully recyclable, it can be die-cut, heat sealed, welded, glued to other materials, sliced, sawn, split, skived, routed and drilled to meet exact specifications.

Available in a wide range of thicknesses and high, medium and low density up to 120mm.

Multi density layers also available from stock in 30mm, 40mm and 50mm in white. Other thicknesses and colours available on request.



General stock product information

Engineered Foam

Standard Stock Product 600mm (Width) x 2750mm (Length)				
Code	Density	Thickness	Colour	Pack Qty
25141	25 kg/m ³	40mm	White	12
25800	25 kg/m ³	50mm	White	10
25300	25 kg/m ³	50mm	Blue	10
25160	25 kg/m ³	60mm	White	8
25952	25 kg/m ³	80mm	White	6
25380	25 kg/m ³	80mm	Blue	6
25949	25 kg/m ³	100mm	White	5
25200	35 kg/m ³	50mm	White	10
25261	35 kg/m ³	60mm	White	8
25205	35 kg/m ³	70mm	White	7
25206	35 kg/m ³	80mm	White	6
25207	35 kg/m ³	100mm	White	5
25410	35 kg/m ³	50mm	Black	10
25417	35 kg/m ³	100mm	Black	5
25400	35 kg/m ³	50mm	Anti-static Pink	10
60001	65 kg/m ³	50mm	White	4

Standard Stock Polylam 1200mm (Width) x 2000mm (Length)				
Code	Density	Thickness	Colour	Pack Qty
66013	28 kg/m ³	13mm	White	25
66020	28 kg/m ³	20mm	White	25
66025	28 kg/m ³	25mm	White	20
66030	28 kg/m ³	30mm	White	16
66040	28 kg/m ³	40mm	White	12
66050	28 kg/m ³	50mm	White	10
66060	28 kg/m ³	60mm	White	8
66070	28 kg/m ³	70mm	White	7
66080	28 kg/m ³	80mm	White	6
66100	28 kg/m ³	100mm	White	5
66450	28 kg/m ³	50mm	Black	10
68400	28 kg/m ³	50mm	Anti-static Pink	10
67533	MDL	30mm	White	10
67400	MDL	40mm	White	10
67553	MDL	50mm	White	10

MDL = Multi Density Layer

Special thicknesses, widths, slits and colours available
 Minimum order quantities and delivery lead times apply.

Call Jiffy Packaging today for information
 about protective packaging solutions.

Tel: +44 (0) 1606 867200 Fax: +44 (0) 1606 861877
 Or visit our website, www.jiffy.co.uk

